



## PE-2 and PE-3/C Geophone Land Cases

- Waterproof land cases for a wide range of I/O Sensor geophones
- Easy case access for geophone or leader cable maintenance
- Stress relief equals cable break strength
- Steel or brass spikes and tripods available

The standard PE-2 and upright PE-3/C land geophone cases provide waterproof termination, protection and ground coupling for a range of I/O Sensor geophones. Four screws form the case closure and allow easy access for geophone or string maintenance in the field. UV-stabilized rubber gaskets seal the assembly and protect the leader cable as it enters the case. A unique stress ring design anchors the cable jacket and conductors resulting in a pull strength equaling the cable itself.

Single entry and dual entry gasket options allow geophone string construction.



PE-2



PE-3/C

## Specifications


INPUT/OUTPUT, INC.

	<b>PE-2</b>	<b>PE-3/C</b>
Geophone types	SM-4, SM-7 standard types	SM-24, SM-4, SM-7, SM-15 upright types
Cable OD	0.457 or 0.533 mm (0.180 or 0.210 in)	0.457 or 0.533 mm (0.180 or 0.210 in)
Length	40 mm (1.57 in)	40 mm (1.57 in)
Width	35 mm (1.38 in)	35 mm (1.38 in)
Height	50 mm (1.97 in)	50 mm (1.97 in)
Weight	132 g (4.62 oz)	130 g (4.55 oz)


## Ordering Information

PE-2 land case	
PE-3/C land case	
Top plate options	yellow, green, blue, red

**PE-2**

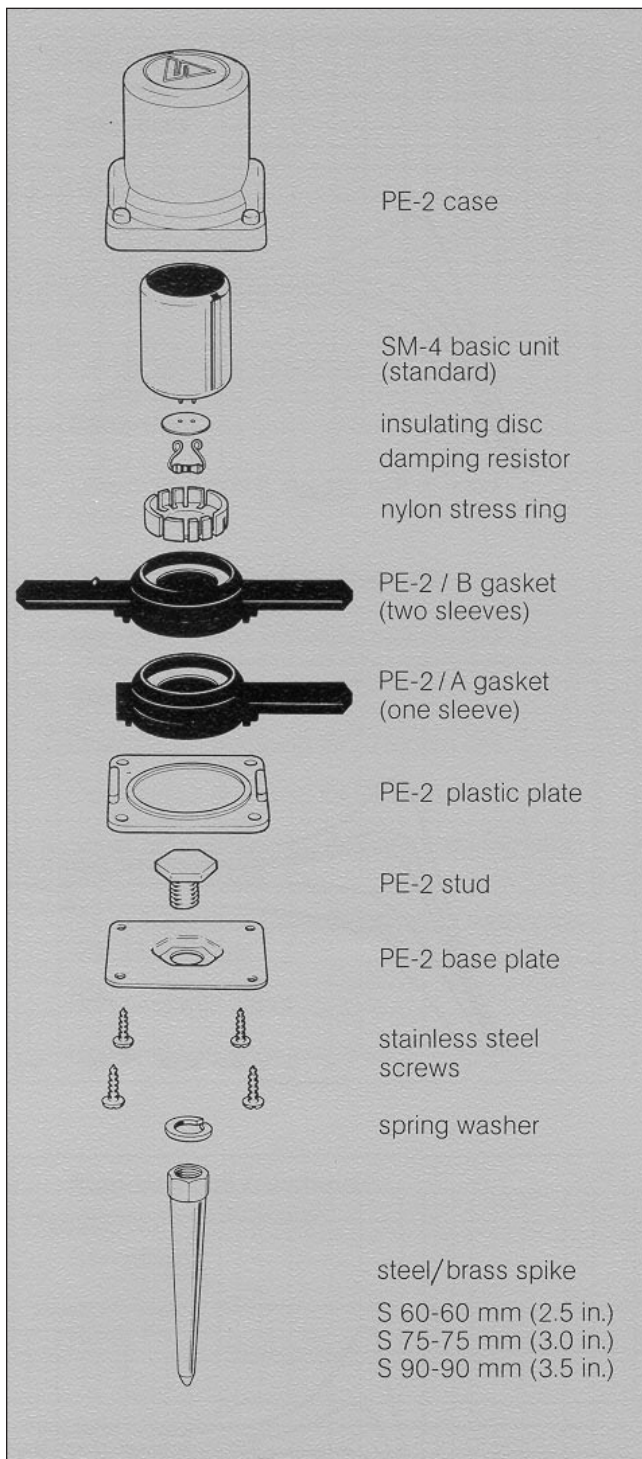

**PE-3/C**

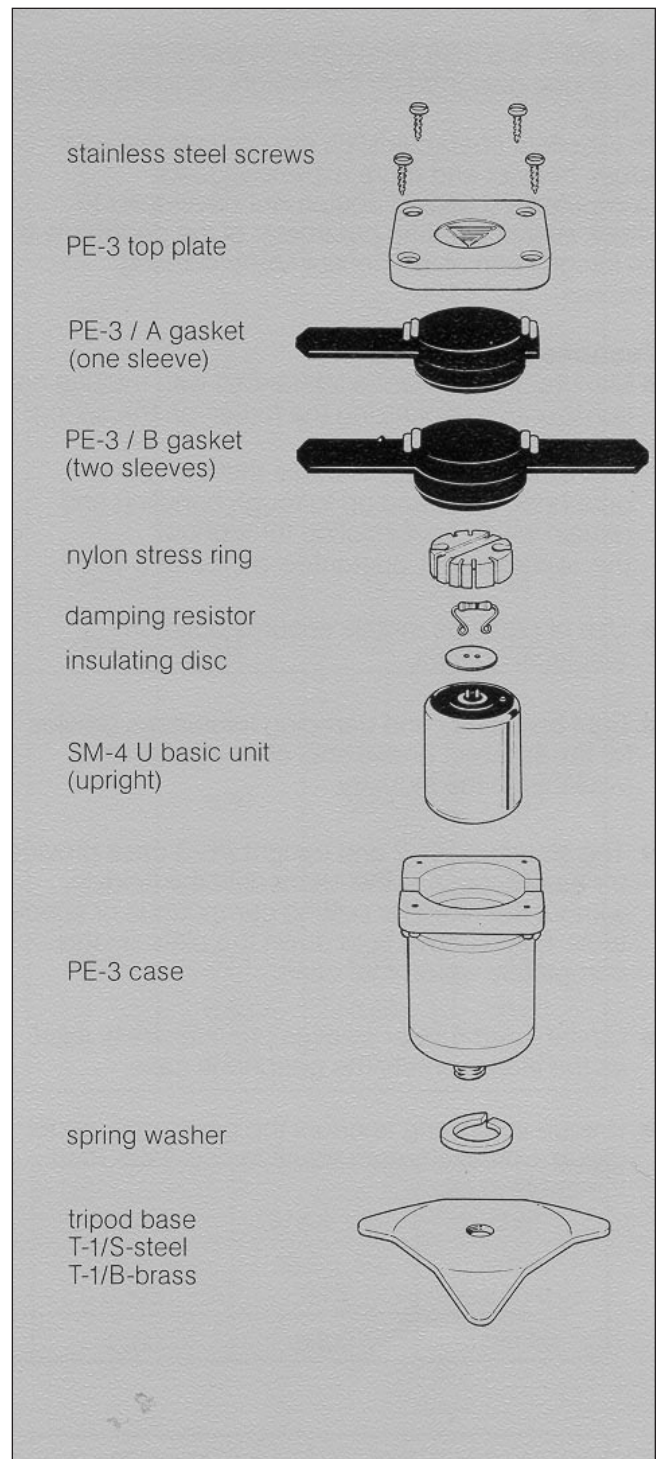

**United States – Stafford, TX**  
 Input/Output, Inc.  
 Fax 281.879.3500  
 Phone 281.933.3339

**Russia**  
 Input/Output, Inc.  
 Fax 7.095.2322240  
 Phone 7.095.2322254

**England**  
 Input/Output, Inc.  
 Fax 44.1603.411403  
 Phone 44.1603.411400

**Web Site**  
[www.i-o.com](http://www.i-o.com)