



SMARTSOLO®

World's First Smart Seismic Sensor



株式会社 **GEOSYS**
〒112-0012
東京都文京区大塚1-5-18
TEL : 03-5940-5951

IGU-BD3C-5

www.SmartSolo.com

SMARTSOLO
S C I E N T I F I C

The leading manufacturer in serving geoscience

SmartSolo® World's First Smart Seismic Sensor

IGU-BD3C-5 is a low-cost, broadband, and micro power consumption broadband smart seismic sensor. Based on the high-sensitivity geophone DT- SOLO——proudly produced by SmartSolo Inc, and incorporated with electronics and software technologies in mobile internet era. With internationally well-received and reliable electronic spread spectrum technology, the frequency band range of IGU-BD3C-5 is up to 0.2Hz-150Hz. Due to its high reliability and high level of customization of storage and power capacity, it is very suitable not only for traditional active seismic exploration, but also for long-period observation of natural microseismic, transient surface wave survey and mobile station natural earthquake monitoring, etc.

Patent Publication Number 20202105852.9
Patent Pending Number 202010513761.2



New Generation 3
components Smart Seismic Sensor



Low frequency can reach to 5s



Internal battery support up to
30 days of continuous recording
(see Technical specs for details)



Support for external power supply
and Bluetooth QC



Built-in GPS receiver and
time-disciplined high precision clock



High resolution data with up to
0.25ms sampling and 32-bit
delta-sigma ADC



Real-time seismic data monitoring
and sensor status QC



Internal 64GB memory
Can be expanded to 128GB



Dual LED for status QC
Indicate Bluetooth,
battery level and working status



Compatible with vibroseis
and impulsive energy sources

DT-SOLO® The Heart of SmartSolo

High-quality seismic data derives from high-quality seismic sensors. DT-SOLO is a high-sensitivity geophone specially designed for point receiver applications. It is well-known in the seismic industry as the top-quality high-sensitivity geophone which is widely used by contractors and equipment manufacturers.

- High Quality
- High Sensitivity
- Low cost
- Super Reliable
- Greater Savings
- Low Distortion
- Single Point Receiver
- Industry Leader



Dedicated AIO, 16 Slots AIO, SoloLite The Peripherals of IGU-BD3C-5

Fast Data Harvesting Speed

USB 3.0 @ 20MB/s

Portable data harvesting and charging

Highly Flexible System Configuration


Complete Software Suite



Dedicated AIO



16 Slots AIO

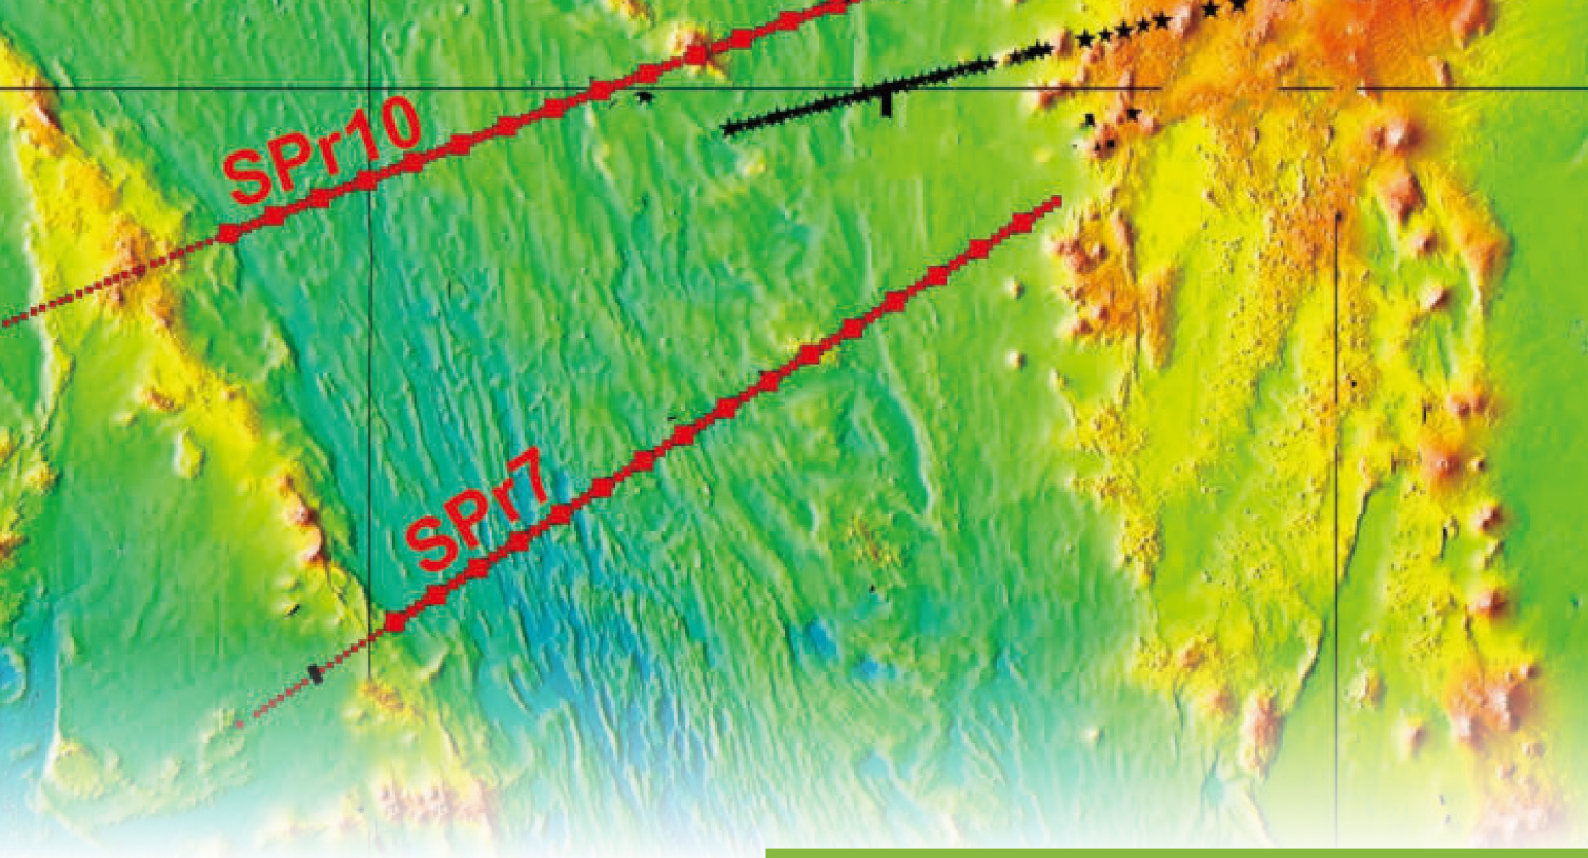

Physical Specs

Seismic data channel(s)	3
ADC resolution	32 bits
Sample interval	0.25,0.5,1,2,4,8,10,20 ms
Instrument Noise Floor	Whole frequency band lower than the NHHM curve 5s~1Hz lower than the NLNM curve
Operating temperature	-40°C ~ +70°C
Waterproof	IP68
Physical Size	Φ158 x160mm (w/o spike)
Weight	2.8 kg (Including internal battery and spike)
Data Storage	64GB (can be expanded to 128GB)
Operating Life@25°C	30 days Continuous 60 days Segmented (12h ON/12h SLEEP)
External Power Supply	7V~ 15V (single supply)
Bluetooth QC	Available
Data Harvesting	USB 3.0
Charging Temperature Range	+3°C~ +45°C
Charging Time	<7.5H, Fully Charged (Standard battery)

Acquisition Performance

Frequency Bandwidth	0.2Hz ~ 150Hz
Distortion	<0.1% @12HZ (0°~ 10°) tilt, (0°~3°) horizontal tilt
Sensitivity	200V/m/s (5.08 V/in/s)
Remark	All parameters are specified at +22°C in the vertical position and horizontal position for horizontal geophone unless otherwise stated

Channel Performance

(@ 2ms sample interval, 31.25 Hz, 25°C, unless otherwise indicated)

Maximum Input Signal	±2.5V _{peak} @ Gain 0dB
Instantaneous Dynamic Range	120dB@ Gain 0dB
Common Mode Rejection	>100dB
Gain Accuracy	<1%
GPS Time Standard	1ppm
Timing Accuracy	+ 10μS, GPS Disciplined
Cross Feed	<-110dB
Inter-channel Phase Offset	<0.1ms
Transverse Vibration Rejection	Better than 0.1%
Inter-channel Amplitude Coherence	5%
System Dynamic Range	140 dB
Frequency Response	0~1652Hz

SmartSolo Inc. reserves the right to change specifications without notice while we improve the quality of our products.

SMARTSOLO S C I E N T I F I C

The leading manufacturer in serving geoscience

International Sales

Unit145,3901-54Ave,NE
Calgary,Ab T3J 3W5
Canada
Tel:+1-403-264 1070
Toll Free:+1-888-604 SOLO(7656)
Email:sales@smartsolo.com

Business Development Centre

301, Building B, No.15 South of Ronghua Road,
BDA, Beijing, 100176, China
Tel:+86-4000-868-158
Fax:+86-10-87220112
Email: marketing@smartsolo.com
support@smartsolo.com